



Technical Information


How the energy from a vehicle impact is calculated

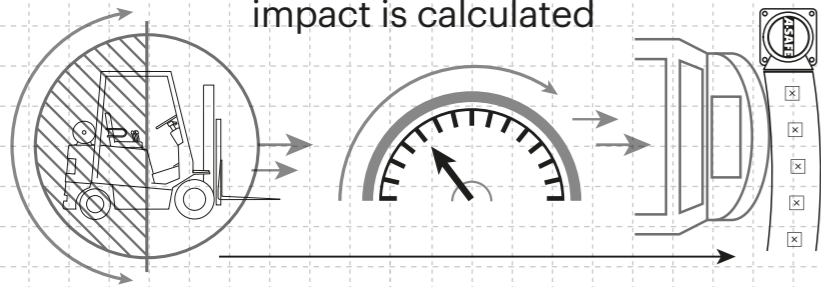

$$\frac{1}{2} \text{ Mass} \times \text{Speed}^2 = \text{Joules}$$


Tested Impact Energy
41,000 Joules
 Equivalent vehicle and speed
 **X** **6 mph impact**
 12.5 ton
 Mid Rail 45° Impact on 78 1/4 inch Post Centers

Impact Test	Impact Angle on 78 1/4 inch Post Centers			
	90°	67.5°	45°	22.5°
Mid Rail Max Energy (Joules)	20,500	24,017	41,000	139,983
End Post Max Energy (Joules) - 90°	6,900			
Mid Post Max Energy (Joules) - 90°	6,900			

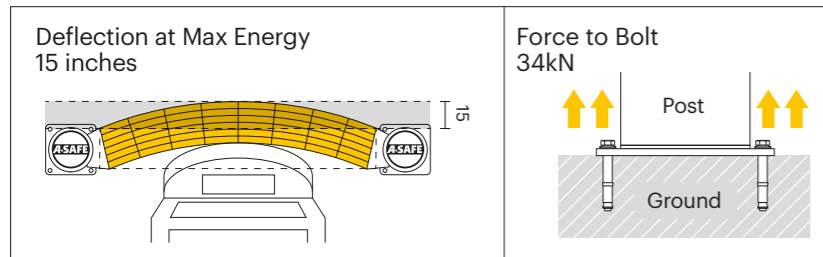

Material Properties	MEMAPLEX™
Temperature Range	14°F to 122°F
Ignition Temperature	698°F to 734°F
Flash Point	662°F to 698°F
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	Yes


* Weathering scale 1 is very poor and 5 is excellent
 ** Light stability scale 1 is very poor and 8 is excellent

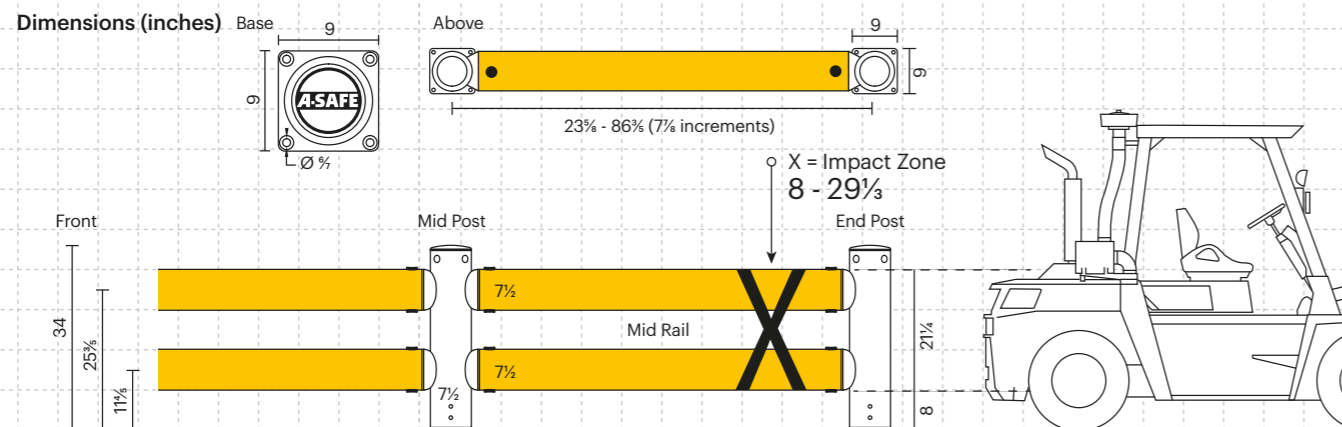

Post Options



Rail Options

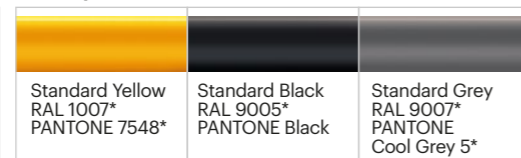

Color Combinations

*Please note that the RAL and PANTONE colors listed are the closest match to standard A-SAFE colors, but may not be exact matches of the actual product color and should be used for guidance only.



iFlex™

Double Traffic Guardrail

A-SAFE



Designed to defend buildings, machinery and equipment from damage caused by vehicle collisions both inside and out.

The Double Rail provides maximum resistance and protection from straying vehicles in high-impact areas.

This flexible, heavy-duty guardrail system guides drivers and shields vital assets by absorbing and deflecting heavyweight forces, preventing incidents and avoiding downtime.

Ideal for larger mass vehicle movement and high traffic areas.

Tested to the global benchmark in guardrail safety

bsi. PAS 13
 Code of Practice for Workplace Safety Guardrails



Engineered for performance

Whether in the resilience, flexibility and in-built memory of our exclusive Memaplex™ material or the unrivalled energy absorption of our unique 3-phase coupling system, a wealth of technical ingenuity goes into every A-SAFE product to ensure that it performs perfectly every time you need it to. We are continuously innovating to solve the greatest workplace safety challenges on behalf of our customers and our numerous patents attest to our industry-leading commitment to research and development.

Ultimate strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Unrivalled recovery through a unique built-in memory that allows the guardrail to flex, cushion and reform repeatedly upon impact, saving vast amounts in guardrail and vehicle repairs.

Huge return on investment from incident prevention and downtime avoidance as guardrails, vehicles, floors and equipment do not need replacing or repair.

Multi-directional system ensures a streamlined fit into any facility and the removal of hard angles.

Ultra-low maintenance material is chemical and water resistant, non-corrosive, non-scratch and self colored so no repainting, rusting, flaking or corrosion.

Exclusive modularity allows rails and posts to be replaced in-situ without removing adjacent guardrail sections.

Energy Absorption System
Patented system dissipates impact forces through the guardrail and away from floors and fixings, preventing costly damage.

Advanced Engineering
Molecular reorientation during manufacturing creates a unique built-in memory that enables the barrier to fully recover following impacts.

Revolutionary 3-Layered Material

- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilized color layer

Hygiene seals remove ingress points.

Food safe, wipe-clean, water resistant surface.

Ergonomic design with no sharp edges.

No floor damage 80% of impact force is absorbed, transferring just 20% to the floor.

Environmentally friendly and 100% recyclable.

Self colored and UV stabilized for continued visibility and long lasting aesthetics with no repainting.

Zinc nickel, electrophoretic coating on base plates as standard, provides advanced protection against corrosion damage.

ADDITIONAL BASE OPTIONS

Countersunk Bolts Creates a flat surface, preventing tyre damage where vehicles are in close proximity.	Galvanized Steel Increased weather resistance for outdoor use and harsh climate environments.	Stainless Steel 316 Standard Ultimate performance option, no corrosion or rusting and resistant to powerful cleaning agents. Ideal for hygiene environments.	Stainless Steel 316 Countersunk

Energy Absorption System

A patented 3-phase system that activates sequentially for unparalleled energy absorption

