



# Product Impact Suitability

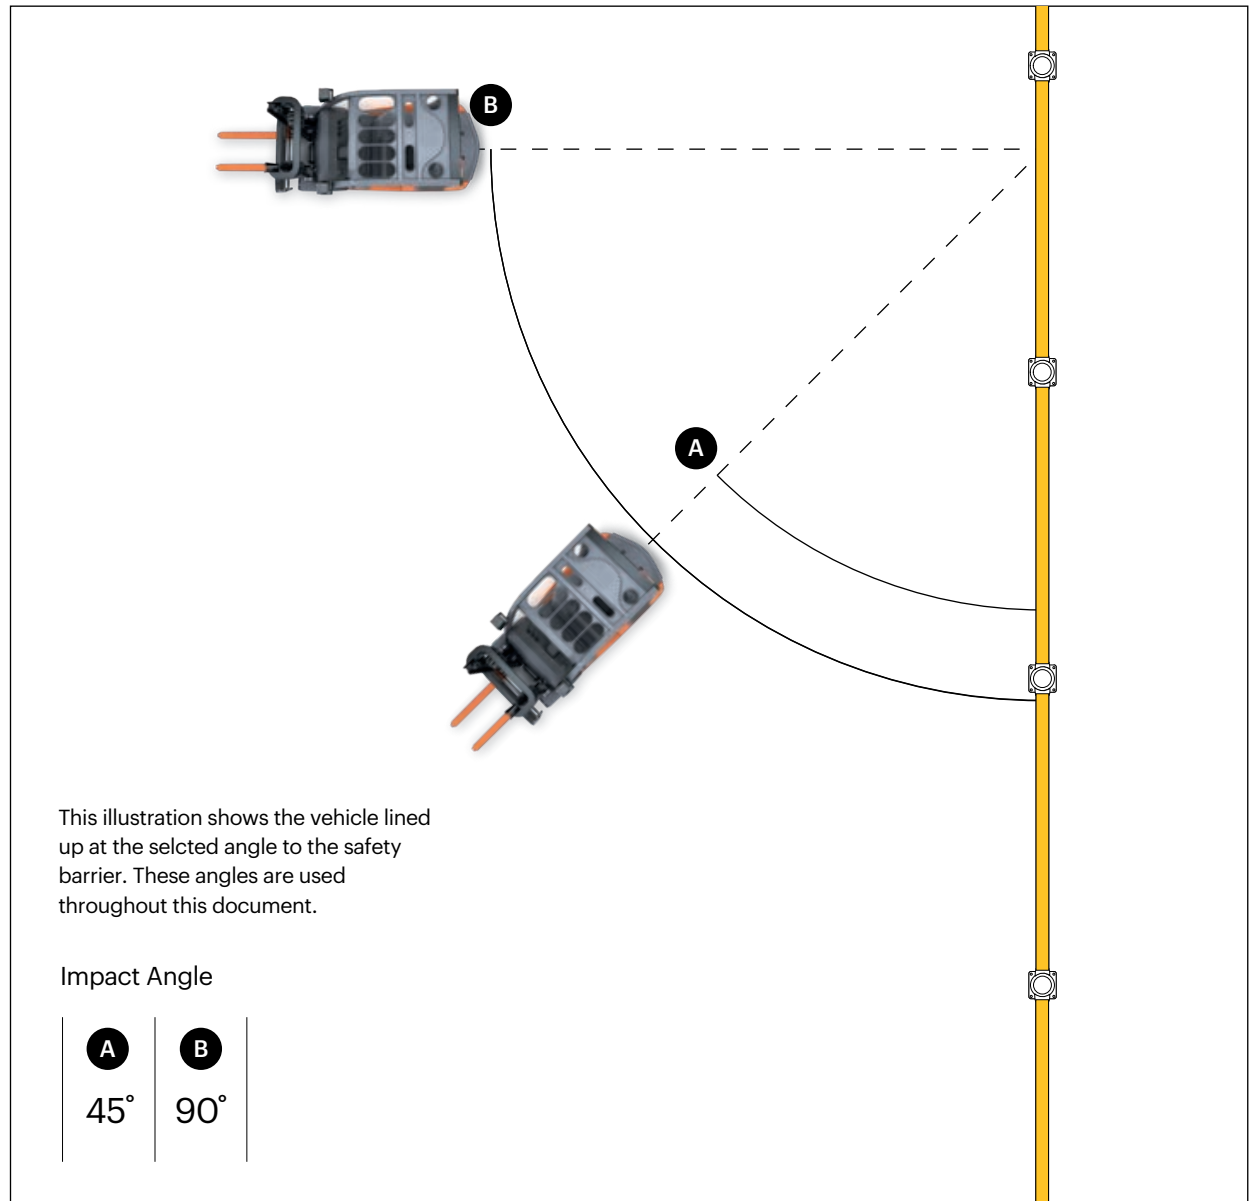
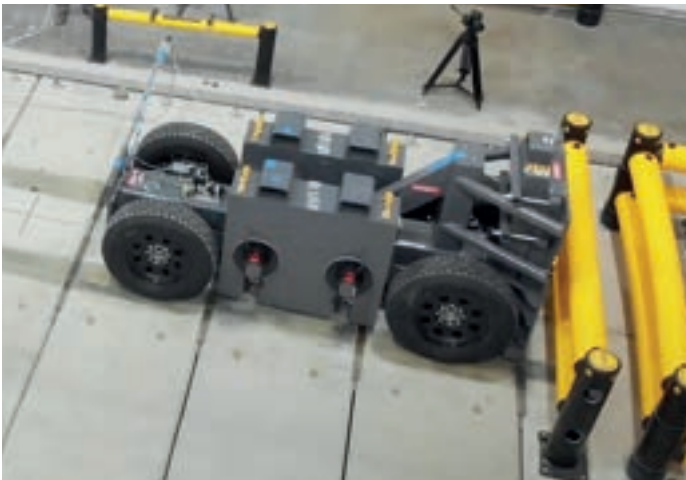
PRH-1072-A-SAFE-30012024-1

# Introduction

This document has been compiled to give advice on specification of protective products based on vehicle weight and speed.

The traffic light system adopted in this document should be used to determine if a product is suitable and offers guidance on complementary products if these are required. We have selected a cross section of the most common vehicles used within workplace facilities to give you an instant reference.

Please note that this is a guide only and we should always request a site visit to ensure the correct barrier application has been made to suit the area of work.



# Product Impact Suitability

Click on the product title below to jump to the specific product page.

## Pedestrian Barriers

[iFlex Pedestrian Barrier 3 Rail](#)

## Micro Barriers

[mFlex Single Traffic Barrier Ground Level](#)

[mFlex Single Traffic Barrier](#)

[mFlex Double Traffic Barrier](#)

## Single Traffic Barriers

[eFlex Single Traffic Barrier](#)

[iFlex Single Traffic Barrier](#)

## Double Traffic Barriers

[iFlex Double Traffic Barrier](#)

[Atlas Double Traffic Barrier](#)

[Atlas Triangle Traffic Barrier](#)

[Atlas Polygon Traffic Barrier](#)

## Traffic Barriers+

[eFlex Single Traffic Barrier+](#)

[iFlex Single Traffic Barrier+](#)

[iFlex Double Traffic Barrier+](#)

[Atlas Double Traffic Barrier+](#)

## Topple Barriers

[Heavy Duty Topple Barrier](#)

## Low Level Protection

[ForkGuard](#)

[Heavy Duty ForkGuard](#)

[Step Guard](#)

## Column & Corner Guards

[iFlexRail Column Guard](#)

[iFlexRail Column Guard+](#)

## Gates

[iFlex Dock Gate](#)

[iFlex Dock Gate XL](#)

[eFlex Dock Gate](#)

[Traffic Gate](#)

## Height Restrictor

[iFlex Height Restrictor](#)

## RackEnd Barriers

[eFlex Single RackEnd Barrier](#)

[eFlex Single RackEnd Barrier with ForkGuard](#)

[eFlex Double RackEnd Barrier](#)

[eFlex Double RackEnd Barrier with ForkGuard](#)

[iFlex Single RackEnd Barrier](#)

[iFlex Single RackEnd Barrier with ForkGuard](#)

## Cold Storage

[eFlex Cold Storage ForkGuard Barrier](#)

[iFlex Cold Storage Pedestrian Barrier 3 Rail](#)

[iFlex Cold Storage Single Traffic Barrier](#)

[iFlex Cold Storage Single Traffic Barrier+](#)

[iFlex Cold Storage Bollard](#)

[iFlex Cold Storage Height Restrictor](#)

[Cold Storage Single RackEnd Barrier](#)

## Bollards

[iFlex Bollard](#)

[iFlex Heavy Duty Bollard](#)

[Monoplex Bollard 130](#)

[Monoplex Bollard 190](#)

## Car Park Specific Protection



[Vehicle Impact & Anti-climb Car Park Barrier](#)

[iFlex Single Car Park Barrier](#)

# iFlex Pedestrian Barrier 3 Rail











## Specification guidance




Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	450 - 1100 / 17 3/4 - 43 1/8
Certification	 

## Application guidance





- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●




# mFlex Single Traffic Barrier Ground Level



## Specification guidance

























Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	50 - 150 / 2 - 6
Certification	










## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.













mFlex Single Traffic Barrier Ground Level is designed to safeguard walls, structures, goods and machinery from the wear-and-tear of frequent low-energy impacts at near-ground level.

**CAUTION:** This product, if positioned incorrectly near pedestrian areas can cause a trip hazard which may result in accidents.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# mFlex Single Traffic Barrier



## Specification guidance




















Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	150 - 250 / 6 - 9 7/8
Certification	










## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.













mFlex Single Traffic Barrier is designed to safeguard walls, structures, goods and machinery from the wear-and-tear of frequent low-energy impacts at near-ground level.

**CAUTION:** This product, if positioned incorrectly near pedestrian areas can cause a trip hazard which may result in accidents.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# mFlex Double Traffic Barrier



## Specification guidance
























Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	150 - 450 / 6 - 17 3/4
Certification	










## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.













mFlex Double Traffic Barrier is designed to safeguard walls, structures, goods and machinery from lightweight hand operated equipment and powered pallet trucks at a low level.

**CAUTION:** This product, if positioned incorrectly near pedestrian areas can cause a trip hazard which may result in accidents.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# eFlex Single Traffic Barrier



## Specification guidance

Post Diameter - mm / inches	158 / 6%
Rail Diameter - mm / inches	158 / 6%
Impact Zone - mm / inches	204 - 362 / 8 - 14 1/4
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		



## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Single Traffic Barrier



## Specification guidance




Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 395 / 8 - 15½ inches
Certification	 

## Application guidance





- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
 Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●



## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●

# iFlex Double Traffic Barrier



## Specification guidance




Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	 

## Application guidance





- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
 Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●

# Atlas Double Traffic Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph	●	●
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●

# Atlas Triangle Traffic Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Atlas Polygon Traffic Barrier



























## Specification guidance










Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	

## Application guidance













-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# eFlex Single Traffic Barrier+



## Specification guidance

Post Diameter - mm / inches	158 / 6%
Rail Diameter - mm / inches	158 / 6% - 100x35 / 4x1%
Impact Zone - mm / inches	204 - 362 / 8 - 14%
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Single Traffic Barrier+



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 / 4
Impact Zone - mm / inches	205 - 395 / 8 - 15½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Vehicle Type	Typical Weight	Typical Speed	45°	90°
Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Double Traffic Barrier+



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 / 4
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Atlas Double Traffic Barrier+







## Specification guidance










Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 / 4
Impact Zone - mm / inches	205 - 745 / 8 - 29½
Certification	

## Application guidance













-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# Heavy Duty Topple Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 - 4
Impact Zone - mm / inches	205 - 745 - 8 - 29½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

Product is supplied with ForkGuard to ensure protection from vehicle forks that may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Vehicle Type	Typical Weight	Typical Speed	45°	90°
Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# ForkGuard



























## Specification guidance










ForkGuard Height - mm / inches	185 / 7 1/4
Impact Zone - mm / inches	0 - 185 / 0 - 0 - 7 1/4
Certification	

## Application guidance













-  ForkGuard can withstand multiple impacts at this weight and speed.
-  ForkGuard can withstand an impact from the vehicle but may sustain damage and should be checked at the fixing points.
-  ForkGuard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

ForkGuard has been designed as a low level product protecting pedestrians, machinery or building columns from vehicle forks.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Heavy Duty ForkGuard
























## Specification guidance










ForkGuard Height - mm / inches	185 / 7 1/4
Impact Zone - mm / inches	0 - 185 / 0 - 0 - 7 1/4
Certification	

## Application guidance













-  ForkGuard can withstand multiple impacts at this weight and speed.
-  ForkGuard can withstand an impact from the vehicle but may sustain damage and should be checked at the fixing points.
-  ForkGuard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Heavy Duty ForkGuard has been designed as a low level product protecting pedestrians, machinery or building columns from vehicle forks.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		



## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Step Guard



























## Specification guidance










Step Guard Height - mm / inches	185 / 7 1/4
Impact Zone - mm / inches	0 - 185 / 0 - 7 1/4
Certification	 

## Application guidance













-  Step Guard can withstand multiple impacts at this weight and speed.
-  Step Guard can withstand an impact from the vehicle but may sustain damage and should be checked at the fixing points.
-  Product cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

CAUTION: This product, if positioned incorrectly near pedestrian areas can cause a trip hazard which may result in accidents.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlexRail Column Guard



## Specification guidance

Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	450 - 1100 / 17 3/4 - 43 1/8
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude in to columns.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlexRail Column Guard+



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 / 4
Impact Zone - mm / inches	205 - 395 / 8 - 15½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude in to columns.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Vehicle Type	Typical Weight	Typical Speed	45°	90°
Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# iFlex Dock Gate


































## Specification guidance

Height (Closed) - mm / inches	672 / 26½
Height (Open) - mm / inches	1740 / 68½
Impact Zone - mm / inches	365 - 555 / 14% - 21%
Certification	













## Application guidance

-  Dock Gate can withstand multiple light impacts and scrapes at this weight and speed.
-  Product can withstand an impact from the vehicle but may sustain damage and should be checked.
-  Dock Gate cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# iFlex Dock Gate XL




































## Specification guidance

Height (Closed) - mm / inches	672 / 26½
Height (Open) - mm / inches	1740 / 68½
Impact Zone - mm / inches	365 - 555 / 14% - 21%
Certification	













## Application guidance

-  Dock Gate can withstand multiple light impacts and scrapes at this weight and speed.
-  Product can withstand an impact from the vehicle but may sustain damage and should be checked.
-  Dock Gate cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# eFlex Dock Gate



































## Specification guidance

Height (Closed) - mm / inches	610 / 24
Height (Open) - mm / inches	1740 / 68½
Impact Zone - mm / inches	381 - 539 / 15 - 21½
Certification	













## Application guidance

-  Dock Gate can withstand multiple light impacts and scrapes at this weight and speed.
-  Product can withstand an impact from the vehicle but may sustain damage and should be checked.
-  Dock Gate cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		



## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Traffic Gate
























## Specification guidance










Height (Closed) - mm / inches	1215 / 47%
Height (Open) - mm / inches	Various
Impact Zone - mm / inches	455 - 645 / 18 - 25%
Certification	 

## Application guidance













-  Traffic Gate can withstand multiple light impacts and scrapes at this weight and speed.
-  Product can withstand an impact from the vehicle but may sustain damage and should be checked.
-  Traffic Gate cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Inspection of the gate should always be carried out after any impact to ensure opening and closing mechanisms are not damaged. Fixing points should be checked regularly to ensure safe use.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Height Restrictor (Post Only)



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	20 - 1200 / 0 - 47¼
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Vehicle Type	Typical Weight	Typical Speed	45°	90°
Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# eFlex Single RackEnd Barrier




































## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	90x90 / 3½x3½
Impact Zone - mm / inches	255 - 345 / 10 - 13½
Certification	













## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# eFlex Single RackEnd Barrier with ForkGuard



































## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	90x90 / 3½x3½
Impact Zone - mm / inches	0 - 345 / 0 - 13½
Certification	













## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# eFlex Double RackEnd Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	90x90 / 3½x3½
Impact Zone - mm / inches	185 - 405 / 7½ - 16
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	●	●
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●

# eFlex Double RackEnd Barrier with ForkGuard



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	90x90 / 3½x3½
Impact Zone - mm / inches	0 - 405 / 0 - 16
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	●	●
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	●	●
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	●	●
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	●	●
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	●	●
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	●	●
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	●	●
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	●	●

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	●	●
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	●	●
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	●	●



## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	●	●
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	●	●
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	●	●
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	●	●




# iFlex Single RackEnd Barrier















## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 395 / 8 - 15½ inches
Certification	 













## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		



## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# iFlex Single RackEnd Barrier with ForkGuard



















## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	0 - 395 / 0 - 15% inches
Certification	 













## Application guidance

-  Barrier can withstand multiple impacts at this weight and speed.
-  Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
-  Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# eFlex Cold Storage ForkGuard Barrier








## Specification guidance










ForkGuard Height - mm / inches	185 / 7 1/4
Impact Zone - mm / inches	0 - 185 / 0 - 0 - 7 1/4
Certification	

## Application guidance













-  ForkGuard can withstand multiple impacts at this weight and speed.
-  ForkGuard can withstand an impact from the vehicle but may sustain damage and should be checked at the fixing points.
-  ForkGuard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

ForkGuard has been designed as a low level product protecting pedestrians, machinery or building columns from vehicle forks.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Cold Storage Pedestrian Barrier 3 Rail



## Specification guidance

Post Diameter - mm / inches	130 / 5 1/8
Rail Diameter - mm / inches	100 / 4
Impact Zone - mm / inches	450 - 1100 / 17 3/4 - 43 1/8
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Cold Storage Single Traffic Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 395 / 8 - 15½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Cold Storage Single Traffic Barrier+



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 395 / 8 - 15½ inches
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

A-SAFE should always suggest the addition of low level protection, using either ForkGuard or Step Guard protection products when vehicle forks may protrude into pedestrian areas.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		


## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		




# Cold Storage Bollard

























## Specification guidance

Bollard Height - mm / inches	1200 - 47¼ 835 / 32%
Impact Zone - mm / inches	0 - 1200 - 0 - 47¼ 0 - 835 / 0 - 32%
Certification	









## Application guidance

-  Bollard can withstand multiple impacts at this weight and speed.
-  Bollard can withstand an impact from the vehicle but may sustain damage and should be checked at the fixing points.
-  Bollard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance 90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	
 Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph	
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle 90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	

# iFlex Cold Storage Height Restrictor



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	0 - 1200 / 0 - 47¼
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		



## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# Monoplex Bollard 130














## Specification guidance

Post Diameter - mm / inches	130 / 5 1/8
Impact Zone - mm / inches	0 - 1125 0 - 44%
Certification	 





## Application guidance

- Bollard can withstand multiple impacts at this weight and speed.
- The bollard can withstand an impact from pedestrians but an alternative product should be specified in workplace pedestrian areas.
- Bollard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	<span style="color: orange;">●</span>
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	<span style="color: green;">●</span>
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	<span style="color: green;">●</span>
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	<span style="color: green;">●</span>
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	<span style="color: red;">●</span>
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	<span style="color: red;">●</span>
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	<span style="color: red;">●</span>
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	<span style="color: red;">●</span>

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	<span style="color: red;">●</span>
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	<span style="color: red;">●</span>
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	<span style="color: red;">●</span>



### Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	<span style="color: lightcoral;">●</span>
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	<span style="color: lightcoral;">●</span>
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	<span style="color: lightcoral;">●</span>
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	<span style="color: lightcoral;">●</span>




# Monoplex Bollard 190mm

























## Specification guidance

Post Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	0 - 1175 0 - 46¼
Certification	 









## Application guidance

-  Bollard can withstand multiple impacts at this weight and speed.
-  The bollard can withstand an impact from pedestrians but an alternative product should be specified in workplace pedestrian areas.
-  Bollard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle 90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle 90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	



## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	




# iFlex Bollard

























## Specification guidance

Post Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	0 - 1175 0 - 46¼
Certification	 









## Application guidance

-  Bollard can withstand multiple impacts at this weight and speed.
-  The bollard can withstand an impact from pedestrians but an alternative product should be specified in workplace pedestrian areas.
-  Bollard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	


## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	




# iFlex Heavy Duty Bollard

























## Specification guidance

Post Diameter - mm / inches	210 / 8¼
Impact Zone - mm / inches	0 - 1175 0 - 46¼
Certification	








## Application guidance

-  Bollard can withstand multiple impacts at this weight and speed.
-  The bollard can withstand an impact from pedestrians but an alternative product should be specified in workplace pedestrian areas.
-  Bollard cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph	
 Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph	
 Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph	
 Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph	
 Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph	
 Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph	
 Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph	
 Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph	

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle  90°
 Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph	
 VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph	
 Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph	

## Service Yard Vehicles

 Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph	
 Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph	
 Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph	
 Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph	

# Vehicle Impact and Anti-climb Car Park Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½ - 100 / 4
Impact Zone - mm / inches	205 - 395 / 8 - 15½
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not be specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650 kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

# iFlex Single Car Park Barrier



## Specification guidance

Post Diameter - mm / inches	190 / 7½
Rail Diameter - mm / inches	190 / 7½
Impact Zone - mm / inches	205 - 395 / 8 - 15½ inches
Certification	

## Application guidance

- Barrier can withstand multiple impacts at this weight and speed.
- Barrier can withstand an impact from the vehicle but may sustain damage and should be checked at the couplings, fixings and base plates for damage.
- Barrier cannot withstand an impact from this vehicle at the published weight and speed and should not specified.

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Pedestrians	200 kg / 440 lbs	3 mph / 4.8 kph		
Electric Pedestrian Stacker	2,350 kg / 5,180 lbs	3.1 mph / 5 kph		
Manual Pallet Truck	2,580 kg / 5,688 lbs	3.1 mph / 5 kph		
Electric Pedestrian Truck	2,650 kg / 5,842 lbs	3.1 mph / 5 kph		
Electric Reach Truck	3,000 kg / 6,614 lbs	4.9 mph / 8 kph		
Lightweight Counterbalance FLT	3,600 kg / 7,936 lbs	4.9 mph / 8 kph		
Horizontal Order Picker	3,650kg / 8,046 lbs	6.2 mph / 10 kph		
Heavy Duty Counterbalance Truck	8,000 kg / 17,637 lbs	4.9 mph / 8 kph		

Vehicle Type	Typical Weight	Typical Speed	Application guidance Impact Angle	
			45°	90°
Electric Tow Tractor	8,250 kg / 18,188 lbs	6.2 mph / 10 kph		
VNA	9,030 kg / 19,907 lbs	3.7 mph / 6 kph		
Engine Counterbalance Heavy Duty Forklift Truck	12,350 kg / 27,227 lbs	3.7 mph / 6 kph		

## Service Yard Vehicles

Vehicle Type	Typical Weight	Typical Speed	45°	90°
Car	1,500 kg / 3,306 lbs	9.9 mph / 16 kph		
Small Van	3,500 kg / 7,716 lbs	9.9 mph / 16 kph		
Small Lorry	10,000 kg / 22,046 lbs	6.2 mph / 10 kph		
Heavy Goods Lorry	36,000 kg / 79,366 lbs	6.2 mph / 10 kph		

If you have any questions please contact  
the product management team at A-SAFE HQ  
Product.Management@asafe.com



Data Sheets



Testing Videos



Certificates

---

## PRODUCTHUB

Document Reference	PRH-1072-A-SAFE-30012024-1
Document Description	Product Impact Suitability
Date Created	May 2024
Author/s	Matthew Briggs
Checked by	Jerry Budby / Mark Bonner
Approved by	Ben Allen
Revision	Version 1 - May 2024